

PHS Duplex

Internal



Elasticity

Robust with reinforced mesh to retain structure.



Permanent Adhesion

Very high tack for permanent bonding.



Durable

Durable bonding with outstanding ageing resistance.

Double sided, ready-to-use tape, for bonding VCL membranes to the substrate including studs, joists, rafters and steel.

Features & Benefits

- Compensates for any building movements.
- Provides a permanent seal.
- Can be plastered and painted over.
- Contains no solvents.
- Offers significant savings due to time advantage.
- Compatible with acrylic glass and polycarbonates.
- Provides high adhesion of the sealing strip on all types of window frame.



Applications

- All construction types.
- Adhesion of AVCL overlaps and bonding in ceils, walls and loft spaces.
- Especially suitable for bonding membrane to metal substrates.

Related Products




PHS
Apollo 2



PHS Spray
Adhesive Plus



PHS Argo Plus
(Multi-Tape)

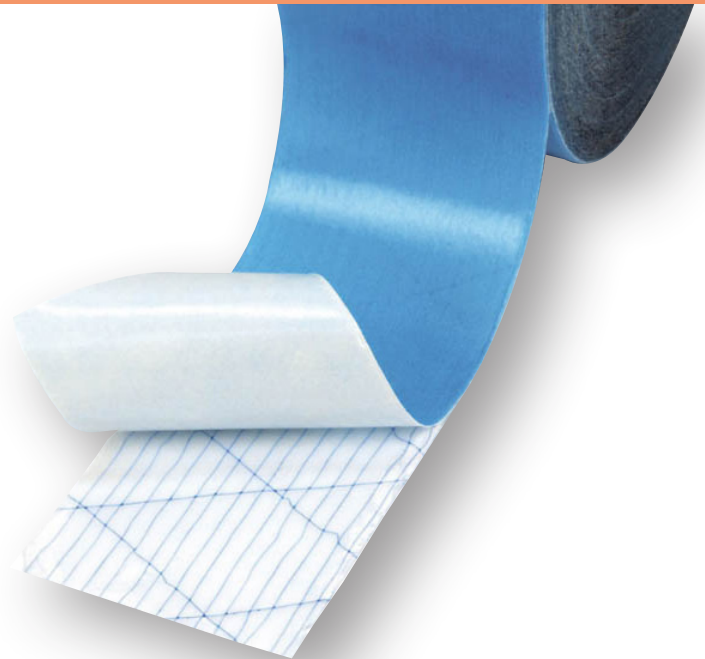

Technical Data

| | |
|------------------------------|---|
| Roll Length | 50m |
| Roll Width | 19mm SKU AR9096C |
| Colour | Transparent + Blue Filament |
| Composition | Polyacrylate adhesive film with silicon backing |
| Thickness without Liner | 0.25mm |
| Ideal Processing Temperature | -10°C to 40°C, recommended > +5°C |
| Temperature Resistance | -30°C to 100°C |
| Storage Temperature | Dry Rooms, +5°C to +25°C |
| Adhesion | ≥25N/25mm |

